



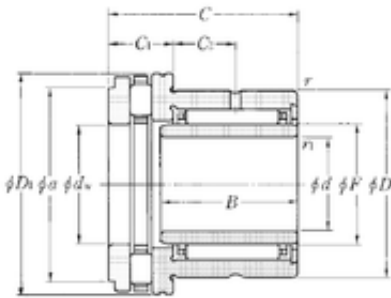

CSC BEARING GROUP limited

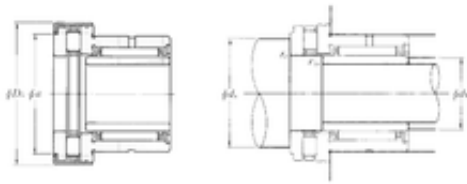

NKXR15T2Z+IR12 × 15 × 16 Bearing 2D drawings and 3D CAD models

12 mm x 24 mm x 16 mm NTN NKXR15T2Z+IR12 × 15 × 16 Compound bearing

Bearing No. NKXR15T2Z+IR12 × 15 × 16

Bore Diameter	12 mm
Outer Diameter	29 mm
d	12 mm
d1	15 mm
F	15 mm
D	24 mm
D1	28 mm
D2	29 mm
B	16 mm
C	23 mm
ra1 max.	0,3 mm
a	23,7 mm
r min.	0,3 mm
r1 min.	0,3 mm
C1	9 mm
da min.	25 mm
db min	14 mm
ra max.	0,3 mm
C2	6,5 mm
Weight	0,06 Kg
Dynamic load rating radial (C)	8,25 kN
Dynamic load rating axial (C)	12,9 kN
Static load rating radial (C0)	10,2 kN
Static load rating axial (C0)	28,6 kN



CSC BEARING GROUP limited

(Grease) Lubrication Speed	2800 r/min
----------------------------	------------