




# CSC BEARING GROUP limited

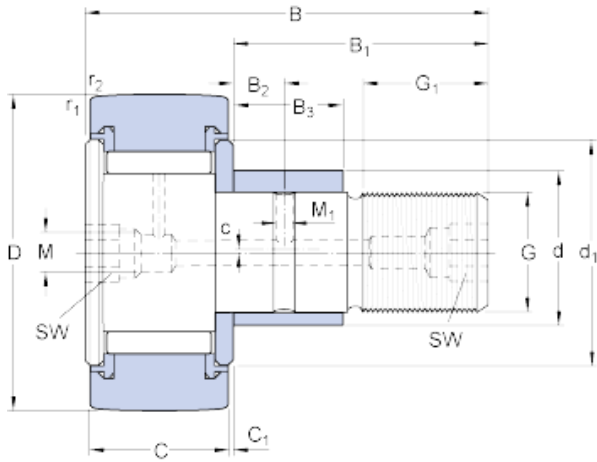

## 15 mm x 30 mm x 40 mm SKF KRVE 30 PPA roller bearing

Bearing No. KRVE 30 PPA

KRVE 30 PPA Bearing 2D drawings and 3D CAD models

Size	15x30x40 mm
Bore Diameter	15 mm
Outer Diameter	30 mm
Width	40 mm
D	30 mm
d	15 mm
B	40 mm
C	14 mm
B <sub>1</sub>	25 mm
B <sub>2</sub>	6 mm
B <sub>3</sub>	11 mm
C <sub>1</sub>	0.6 mm
d <sub>1</sub>	23 mm
G	M 12x1.5
G <sub>1</sub>	13 mm
M	4 mm
M <sub>1</sub>	3 mm
SW	6 mm
c	0.5 mm
r <sub>1,2</sub> - min.	0.6 mm
Basic dynamic load rating - C	9 kN
Basic static load rating - C <sub>0</sub>	14.6 kN
Fatigue load limit - P <sub>u</sub>	1.7 kN



## CSC BEARING GROUP limited

Maximum dynamic radial loads - $F_r$	11 kN
Maximum static radial loads - $F_{0r}$	15.6 kN
Limiting speed	3200 r/min
Mass support roller	0.096 kg
Recommended tightening torque	22 N · m
Grease fitting	NIP A1x4.5
Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.111
Product Group	B04144
$B_1$	25 mm
$B_2$	6 mm
$B_3$	11 mm
$C_1$	0.6 mm
$d_1$	23 mm
$G_1$	13 mm
$M_1$	3 mm
$r_{1,2}$ min.	0.6 mm
Basic dynamic load rating C	8.97 kN
Basic static load rating $C_0$	14.6 kN
Fatigue load limit $P_u$	1.66 kN
Maximum dynamic radial loads $F_r$ max.	11 kN
Maximum static radial loads $F_{0r}$ max.	15.6 kN
Mass cam follower	0.096 kg
Hexagonal nut	M 12x1.5