




CSC BEARING GROUP limited

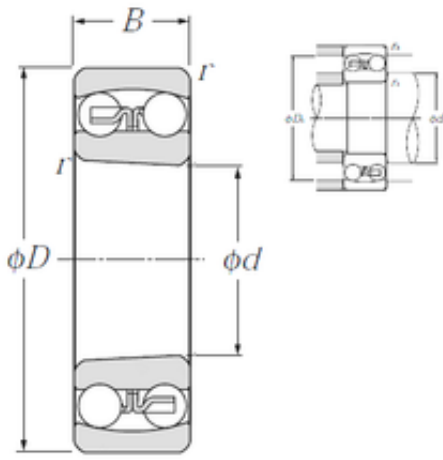

Tapered bore

90 mm x 160 mm x 30 mm NTN 1218SK Self aligning ball bearing

Bearing No. 1218SK

1218SK Bearing 2D drawings and 3D CAD models

Size	90x160x30 mm
Bore Diameter	90 mm
Outer Diameter	160 mm
Width	30 mm
d	90 mm
D	160 mm
B	30 mm
C	30 mm
r min.	2 mm
da min.	99 mm
Da max.	151 mm
ra max.	2 mm
Weight	2,55 Kg
Basic dynamic load rating (C)	57,5 kN
Basic static load rating (C0)	23,5 kN
(Grease) Lubrication Speed	3 600 r/min
(Oil) Lubrication Speed	4 300 r/min
Calculation factor (e)	0,17
Calculation factor (Y0)	3,9
Calculation factor (Y1)	3,8
rs min	2 mm
Associated sleeve reference	H218X
e	0.17
Y1	3.8
Y2	5.8



CSC BEARING GROUP limited

Y0	3.9
Radial clearance class	CN
Precision class	P0
Mass	2.55 kg
Dynamic load, C	57.5 kN
Static load, C0	23.5 kN
Nlim (oil)	4,300 rpm
Nlim (grease)	3,600 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
da min	99 mm
da max	111 mm
db min	95 mm
Ce min	6 mm
Da max	151 mm
ra max	2 mm