




CSC BEARING GROUP limited

20 mm x 40 mm x 6 mm NSK 52204 Ball bearing

Bearing No. 52204

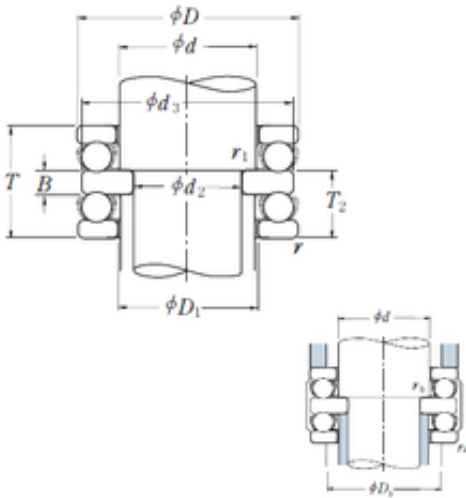

52204 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|---------------------|
| Size | 20x40x26 mm |
| Bore Diameter | 20 mm |
| Outer Diameter | 40 mm |
| Width | 26 mm |
| d | 20 mm |
| d2 | 15 mm |
| D | 40 mm |
| T | 26 mm |
| T2 | 16 mm |
| d3 | 40 mm |
| r min. | 0,6 mm |
| r1 min. | 0,3 mm |
| B | 6 mm |
| D1 | 22 mm |
| Da max. | 30 mm |
| ra max. | 0,6 mm |
| rb max. | 0,3 mm |
| Weight | 0,148 Kg |
| Basic dynamic load rating (C) | 22,5 kN |
| Basic static load rating (C0) | 37,5 kN |
| (Grease) Lubrication Speed | 4000 r/min |
| Category | Thrust Ball Bearing |
| Inventory | 0.0 |
| Manufacturer Name | NSK |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.15 |



CSC BEARING GROUP limited

| | |
|-------------------------------------|---|
| EAN | 0029176062421 |
| Product Group | B00308 |
| Rolling Element | Ball Bearing |
| Thrust Bearing | Yes |
| Single or Double Direction | Double Direction |
| Banded | No |
| Cage Material | Steel |
| Precision Class | Non-Precision |
| Component Description | Roller Assembly Plus Raceways |
| Other Features | Double Row With Flat Seat |
| Long Description | 15MM Bore 1; 22MM Bore 2; 40MM Outside Diameter; 26MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision |
| Inch - Metric | Metric |
| Category | Thrust Ball Bearings |
| UNSPSC | 31171552 |
| Harmonized Tariff Code | 8482.10.50.08 |
| Noun | Bearing |
| Keyword String | Ball Thrust |
| Manufacturer URL | http://www.nskamericas.com |
| Manufacturer Item Number | 52204 |
| Weight / LBS | 0.32628 |
| Bore 1 | 0.591 Inch 15 Millimeter |
| Height | 1.024 Inch 26 Millimeter |
| Outside Diameter | 1.575 Inch 40 Millimeter |
| Bore 2 | 0.866 Inch 22 Millimeter |
| Overall Height with Aligning Washer | 0 Inch 0 Millimeter |